



HOW TO USE Calla Flip Stand

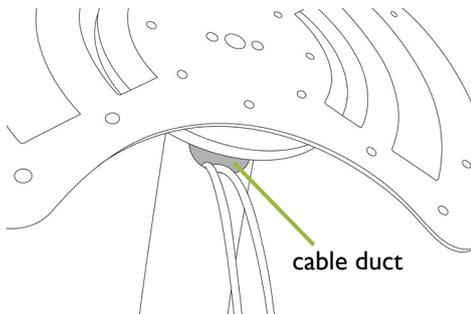

1 Preparation


It is advisable to insert the cables into the tube, before the display is mounted. For this purpose, there is an opening below the display attachment.

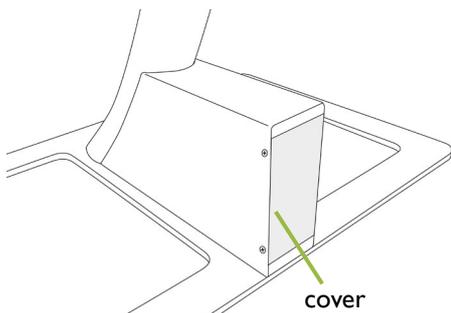

2 PC box


To place a PC in the box at the foot, remove the four countersunk screws on the side with an Allen key, so the rear cover can be removed.

If the PC box is not needed, it can also be removed completely by unfastening the nuts inside.

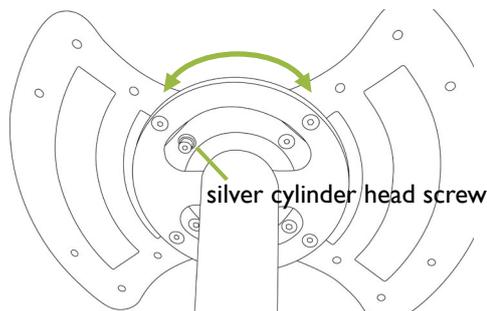

3 Rotation limiter

The head section can be rotated by 90°. To make a turn in the other direction (or if necessary, a 360° turn → for this please consider the cable guide!), take out the silver cylinder head screw and swap it with one of the other silver countersunk screws. Please note, that all 4 screws must be tightened for a secure fit.

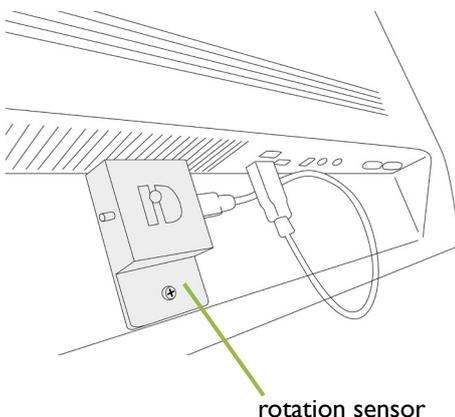

4 Rotation sensor

The rotation sensor (small black box with USB cable) can be fixed to a Sharp display using screws. Alternatively, it can be fixed with double-sided adhesive tape on the back of the display. The USB cable must be connected to the PC and it then sends a keyboard command to the PC to rotate the image.

If the image does not turn correctly after connecting the sensor, please turn the display back to the 0° position (horizontal) and press the button on the sensor box. The picture is then turned to the correct position.

The PC recognizes the rotation sensor as a keyboard and sends an according keyboard command to the PC, when the display is turned. If it does not respond, this shortcut (CTRL-ALT-arrow key) might have to be activated in the display settings. Alternatively you can find the tool *idRotate.exe* on our support page (www.interactive-displays.de/en/support). This program runs in the background and should be placed in the autostart on the pc.